



MEDIUM VOLTAGE

CYLINDRICAL FUSE LINKS

CYL medium voltage fuse links

MV cylindrical fuse links range comprise three sizes with dimensions 10x85, 10x150 and 10x180mm, with rated currents between 2A and 12A and rated voltages of 1500 V AC, 2500 V AC, 3200V AC and 5500 V AC.

They have a **g breaking range** (protection against overload and short-circuits) and are made with ceramic tubes having high breaking capacity and good withstand against thermal chock. Contacts are made in silver plated copper.

One of the applications of these fuse links are the protection of supply networks of public lighting at higher voltages (between 900V and 5.500V AC) usually used by means of special transformers designed for this purpose that increase the voltage for transportation and reduce it in the destination at adequate levels. These distribution networks allow energy transportation at very high distances with installations more economic and efficient.

10x85

U **1500V AC**

BREAKING
CAPACITY **20kA**

In
(A)

REFERENCE

PACKING
Uni /BOX

2	415005	4/24
3,15	415010	4/24
4	415015	4/24
5	415020	4/24
6,3	415025	4/24
8	415030	4/24
10	415035	4/24
12	415040	4/24



10x150

U **2500V AC**

BREAKING
CAPACITY **15kA**

2	415105	4/24
3,15	415110	4/24
4	415115	4/24
5	415120	4/24
6,3	415125	4/24
8	415130	4/24
10	415135	4/24
12	415140	4/24



10x180

U **3200V AC**

BREAKING
CAPACITY **15kA**

2	415205	4/24
2,5	415210	4/24
3,15	415215	4/24
4	415220	4/24
5	415225	4/24
6,3	415230	4/24
8	415235	4/24
10	415240	4/24
12	415245	4/24



U **5500V AC**


BREAKING
CAPACITY **10kA**

2	415305	4/24
2,5	415310	4/24
3,15	415315	4/24
4	415320	4/24

CYL medium voltage fuse links




DIMENSIONS

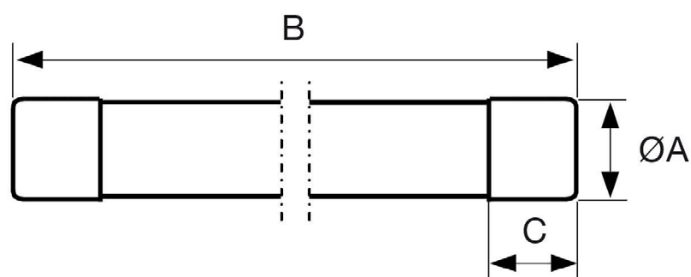


	A	B	C
10x85	10,3	85	10
10x150	10,3	150	10
10x180	10,3	180	10

t-I CHARACTERISTICS

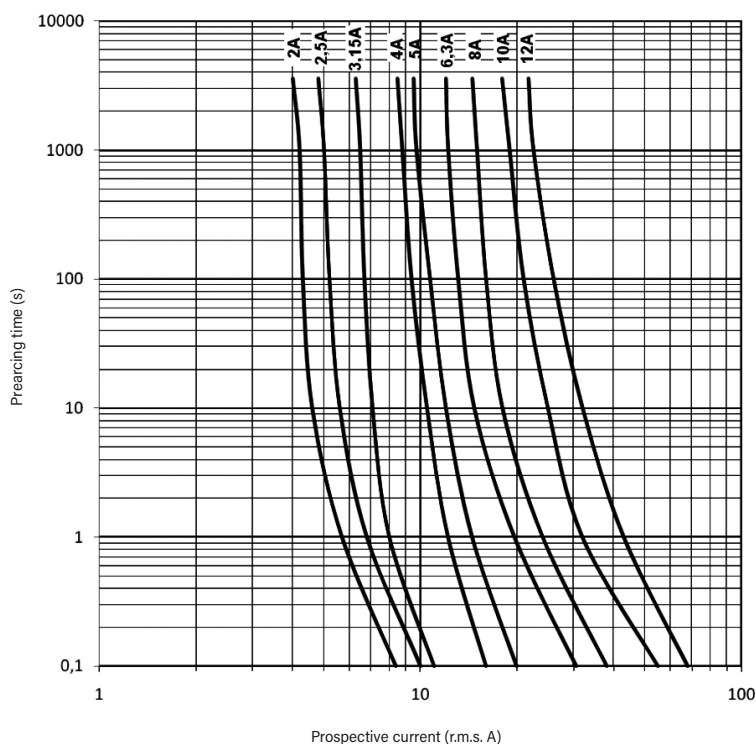



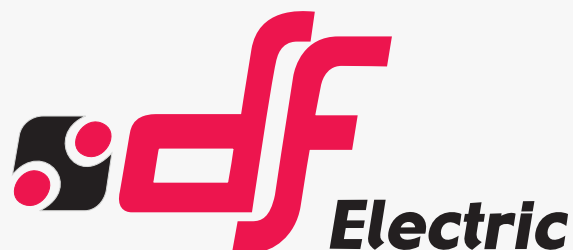

PROTECTING THE WORLD

HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

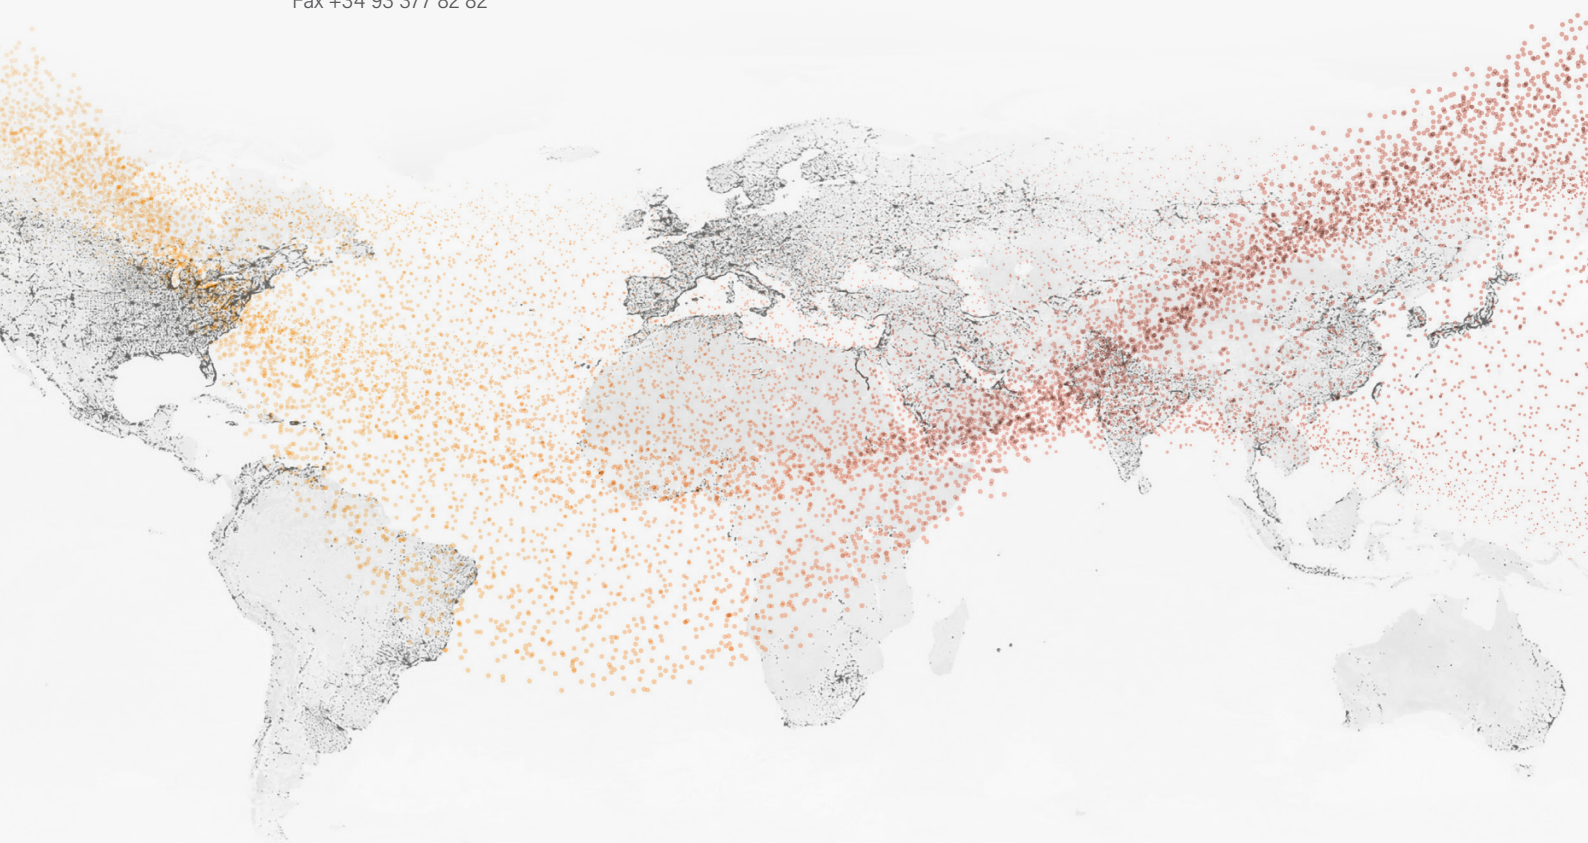

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2023 DF Electric. All rights reserved